



Flooring

Health
Aerospace
Automotive
Pharmaceutical
Manufacturing
Food and Beverage
Commercial and Retail
Waste-water/Treatment

Floor Coatings

Fossilcoat WB

Water-based epoxy coating comes in colored or clear, applied even on damp in floors or substrate; offering an easy to clean hygienic coating that's cost effective

Water-based epoxy is dry flowable epoxy coating suitable for all application for concrete or masonry that requires waterproofing and provide an easy to clean hygienic coating that cost effective.

Fossilcoat PU

Single Polyurethane coating that exhibits a flexibility, gloss coating with excellent stain and scratch resistance.

Fossilcoat Rapide WB


Single pack water-based polyurethane coating which is durable and with a matt finish. It is VOC compliant and contains silver ions for antimicrobial property.

Fossilcoat Impact


VOC free high build polyurethane with remarkable impact & crack sealing capabilities

Fossilcoat Robust

Double pack epoxy floor coating with high scratch resistance, shiny effect, chemical resistant and high durability. Also available in anti-slip.

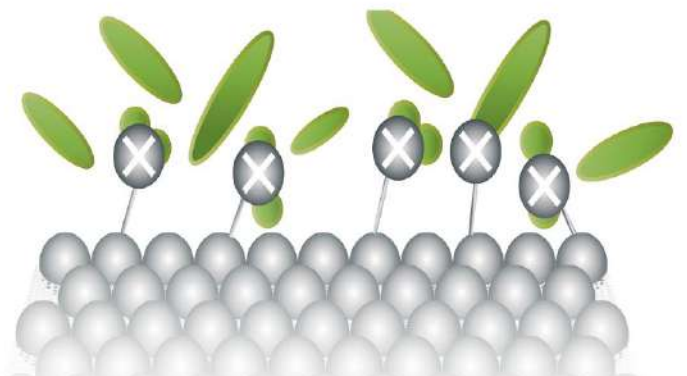

Silver ions inhibit the growth of bacteria, yeast and algae

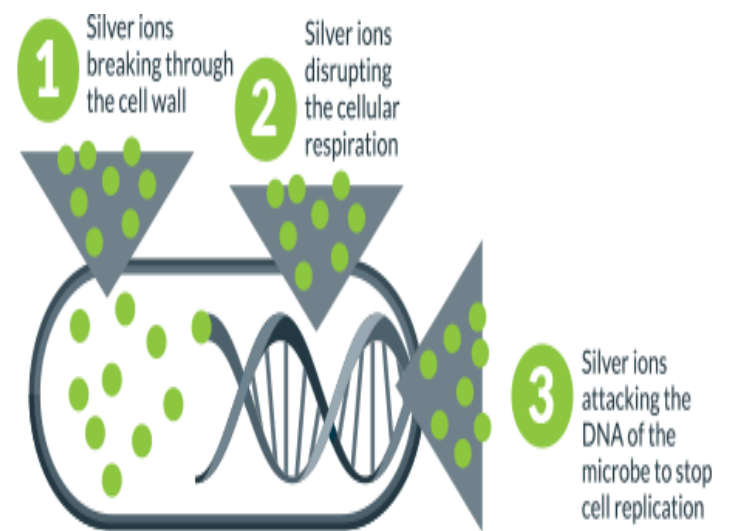

Color Chart

Disclaimer: The ink printed colours on this brochure are indicative colours and will vary from the actual resin colours.





Color Chart

Disclaimer: The ink printed colours on this brochure are indicative colours and will vary from the actual resin colours.



Polyscreed products incorporate an antimicrobial additive based on silver ion technology.



Fossilscreed Polyurethane Floor Screeds

Fossilscreed SL

Self-leveling polyurethane floor coating of 2-3mm thick with a matte finish and outstanding resistant to chemicals

Fossilscreed MF

Self-leveling polyurethane floor coating of 4mm thick suitable for moderate duty floor of compressive strength, non-slip suitable and high abrasion resistant

Fossilscreed RT

5-6mm polyurethane coating for Heavy duty floor, applied using rake and trowel

Fossilscreed HF

Polyurethane floor coating of 6-9mm suitable for wet processing areas

Fossilscreed WR

vertically applied between 2-5mm coving material made up of polyurethane

Fossilscreed UT

Ultra-tough polyurethane floor coating that is non-slip suitable for slippery and dump environments

Fossilscreed LOCKCOAT

Impervious sealant for WR or restoration of FOSSILSCREED screeds



Fossilshield Color Chart

Fossilshield Quartz Colors

Custom colour combinations on request



Disclaimer: The ink printed colours on this brochure are indicative colours and will vary from the actual resin colours.

Self-levelling Screeds

Fossilshield SL 1000

1mm self-leveling epoxy coating for none wet processing areas. Give a glossy and smooth finish

Fossilshield SL 2000

Heavy duty 2mm self-leveling epoxy coating with unique wear and abrasion resistance

Fossilshield Impact SL

Self-leveling 1.5-2.5mm polyurethane with excellent sealing/restoration capabilities, ideal for refrigeration rooms and floors subjected to vibration and movement

Fossilshield Quartz

Self-leveling, solvent free 2-4mm epoxy coating system with an exceptional terrazzo quartz appearance that are available in selected range of colours either matte or glossy finish



Anti-Static Flooring

Fossilscreed MD ESD

Matte finish Polyurethane floor coating specialized in Heavy duty anti-electrostatic activities and high solvent and chemical resistant



Commercial & Decorative Flooring

Fossilscreed Epoxy Terrazzo

Decorative terrazzo finish that exhibits an exposed aggregate texture with a smooth surface of uniform color designed for excellent resistance to abrasion

Smooth and Patch

Cementitious render for floor leveling and repair system which is decorative and available in variety of colors

Fossilscreed Quartz

Colored quartz screed with excellent resistance wear and abrasion. It's ideal for commercial places

Heavy Duty

Decorative PU Screed

Polyscreed GHF Terrazzo

An exceptional polyurethane Terrazzo floor that is suits a variety of environments providing high performance floor and beauty

FossilRubber

Waterproof sealant

- Multi-purpose coating that cures into a waterproof membrane
- Applicable for: roofs, RV's, gutters, planters, foundations, etc
- Excellent adhesion, chemical and UV resistance
- Flexible and resistant to freeze/thaw cycles
- Water based, no harmful solvents or VOC's
- Color options available

Coverage

- ⇒ For flat surfaces with standing water - final membrane must use at least 20 ft² (1.85m²) per G (3.78L)
- ⇒ For vertical surfaces - final membrane must use at least 30 ft² (2.8m²) per G (3.78L)

Additional Tips

- ⇒ Avoid hot, direct and intense sun when applying.
- ⇒ Product stays soft, flexible and may have some tackiness, not meant as a walking surface.
- ⇒ You can re-coat when it's dry to touch and make sure there is no uncured material underneath.
- ⇒ For larger areas, pour out and spread around with a roller or squeegee.

Fossilscreed Quartz Colours

Custom colour combinations on request



Neptune



Moon



Stardust



Mercury



Pluto



Mars



Venus



Saturn



Earth

Disclaimer: The ink printed colours on this brochure are indicative colours and will vary from the actual resin colours.



**Manufacturers and Distributors of High Performance, Technologically Advanced,
Durable, Hygienic, HACCP Compliant Flooring and
Construction Related systems**



***Fossilcote Limited manufactures a wide range of Epoxy and
Polyurethane
Flooring Systems locally, using International Technology.***

East Africa

Address

Building J3, Dul Dul Enterprises,
Sabaki, Along Mombasa Road.
P.O. Box 73806 – 00200, Nairobi, Kenya

Contact

Email: info@fossilcote.com
Website: www.fossilcote.com
+254797367745 | +254 20 2004177

South Africa

Address

43 Liedla Street, Kuils River,
Cape Town, South Africa

Contact

Email: Info.southafrica@fossilcote.com
Website: www.fossilcote.com
+27 63290649 | +27 219031750



Fossilcote Limited



Fossilcote Limited



Fossilcote Limited



@fossilcote.ke